



IES ROAD REPORT
PHOTOMETRIC FILENAME : AX-70-30-5-C.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] 12593999.07
[TESTLAB] UL Verification Services Inc.
[ISSUE DATE] 11/19/2018
[MANUFAC] Express Imaging Systems LLC dba Evluma
[LUMCAT] AX-70-30-5-C (Scaled from AX-70-50-5-C)
[LUMINAIRE] Gray metal housing, white plastic reflector and cutoff gla
[MORE] ss lens
[LAMP] One (1) white LED with optic below
[BALLAST] Internal
[OTHER] This test was performed using the calibrated photodetector met
[MORE] hod of absolute photometry.

CHARACTERISTICS


IES Classification	Type VS
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	9016
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	129
Total Luminaire Watts	70
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	2628.893
Maximum Candela Angle	155H 52.5V
Maximum Candela (<90 Degrees Vertical)	2628.893
Maximum Candela Angle (<90 Degrees Vertical)	155H 52.5V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	358.41 (4.0% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

IES ROAD REPORT
PHOTOMETRIC FILENAME : AX-70-30-5-C.IES

LUMINAIRE CLASSIFICATION SYSTEM (LCS)

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	611.7	N.A.	6.8
FM - Front-Medium (30-60)	2654.4	N.A.	29.4
FH - Front-High (60-80)	1171.5	N.A.	13.0
FVH - Front-Very High (80-90)	70.2	N.A.	0.8
BL - Back-Low (0-30)	611.7	N.A.	6.8
BM - Back-Medium (30-60)	2654.4	N.A.	29.4
BH - Back-High (60-80)	1171.5	N.A.	13.0
BVH - Back-Very High (80-90)	70.2	N.A.	0.8
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	9015.6	N.A.	100.0
BUG Rating	B3-U0-G1		


COEFFICIENTS OF UTILIZATION

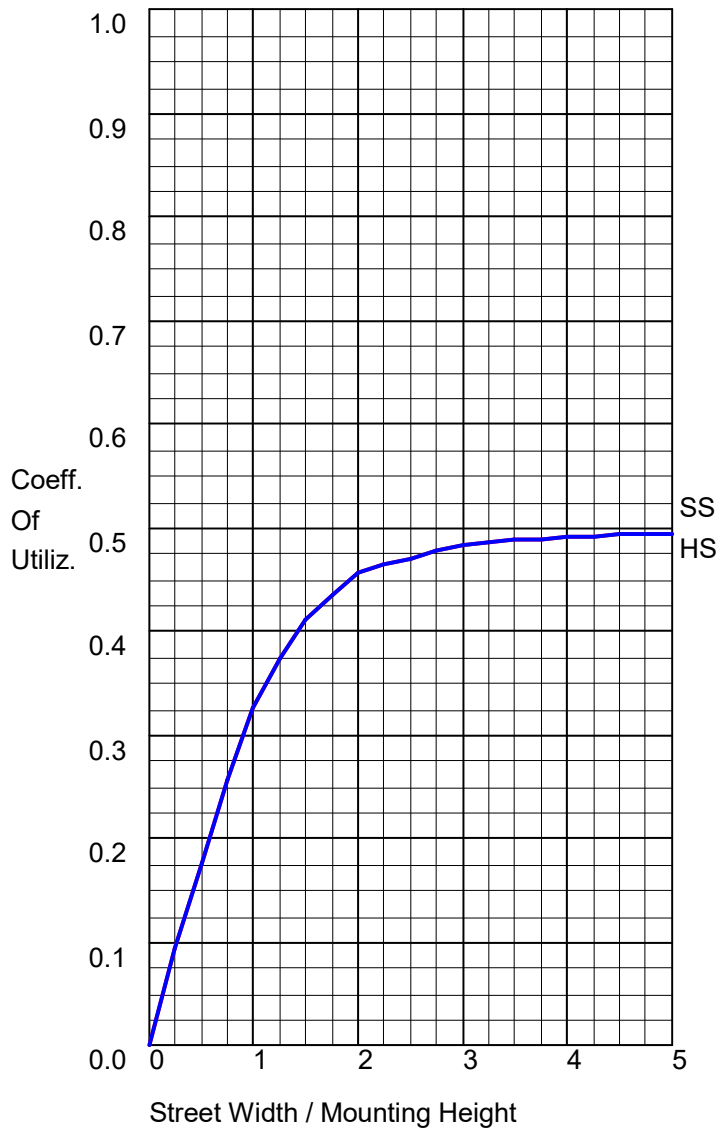

FLUX DISTRIBUTION


	Lumens	Percent Of Luminaire
Downward Street Side	4507.9	50.0
Downward House Side	4507.9	50.0
Downward Total	9015.8	100.0
Upward Street Side	0.0	0.0
Upward House Side	0.0	0.0
Upward Total	0.0	0.0
Total Flux	9015.8	100.0

POLAR GRAPH

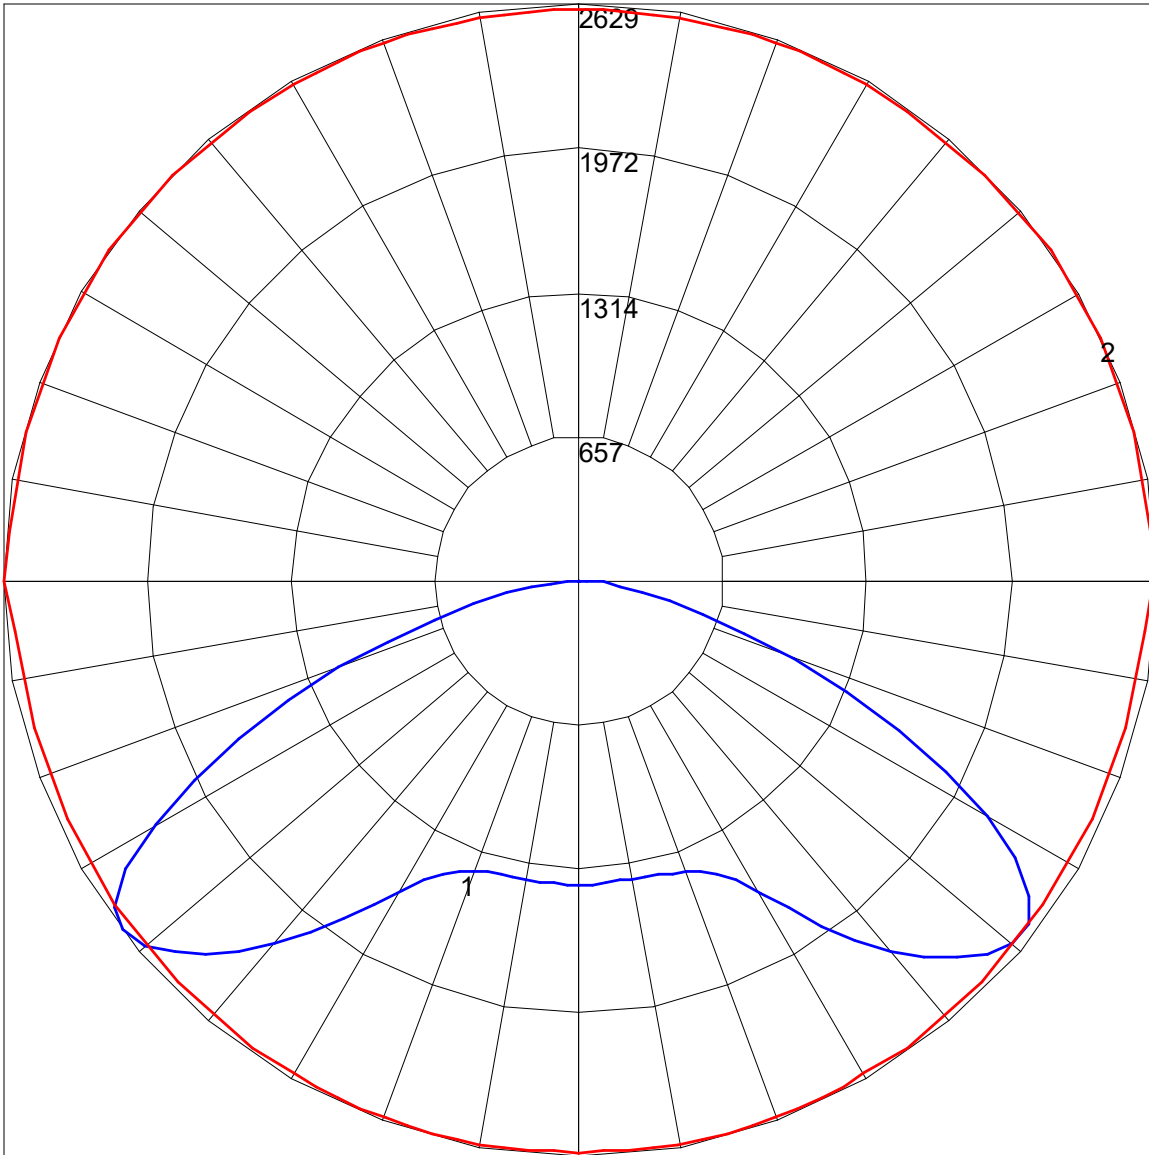


Maximum Candela = 2628.893 Located At Horizontal Angle = 155, Vertical Angle = 52.5
1 - Vertical Plane Through Horizontal Angles (155 - 335) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (52.5) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

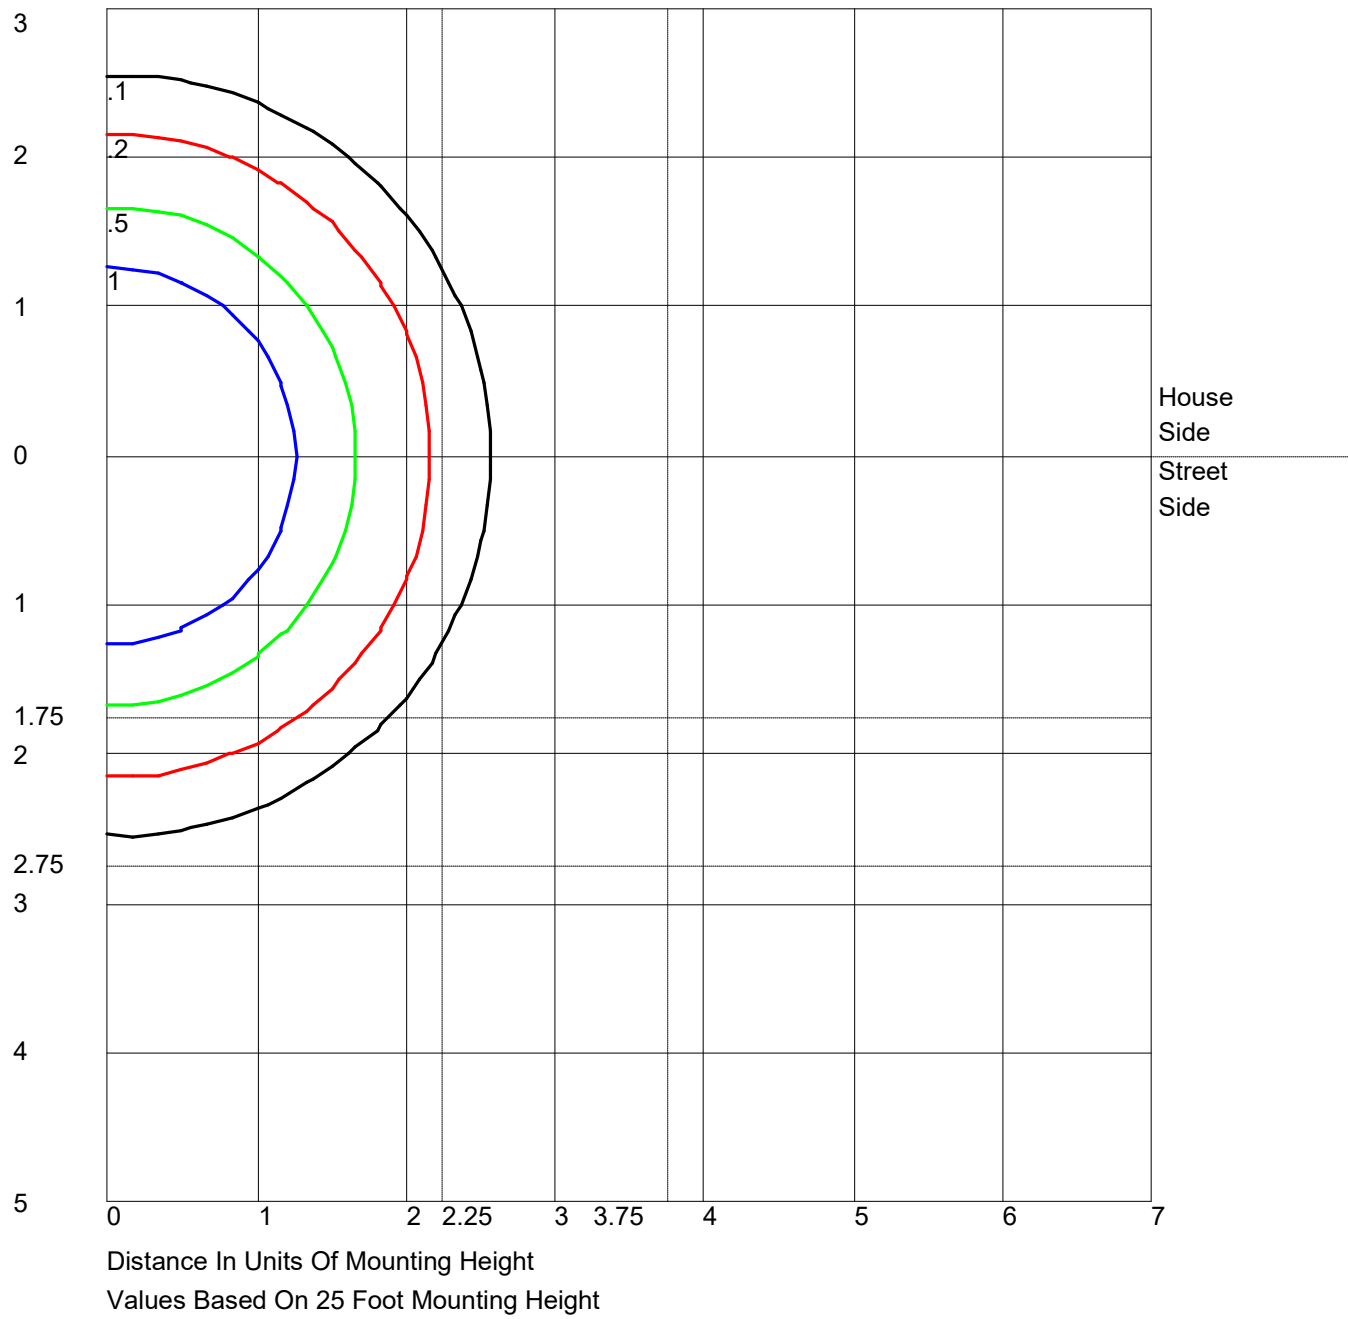

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

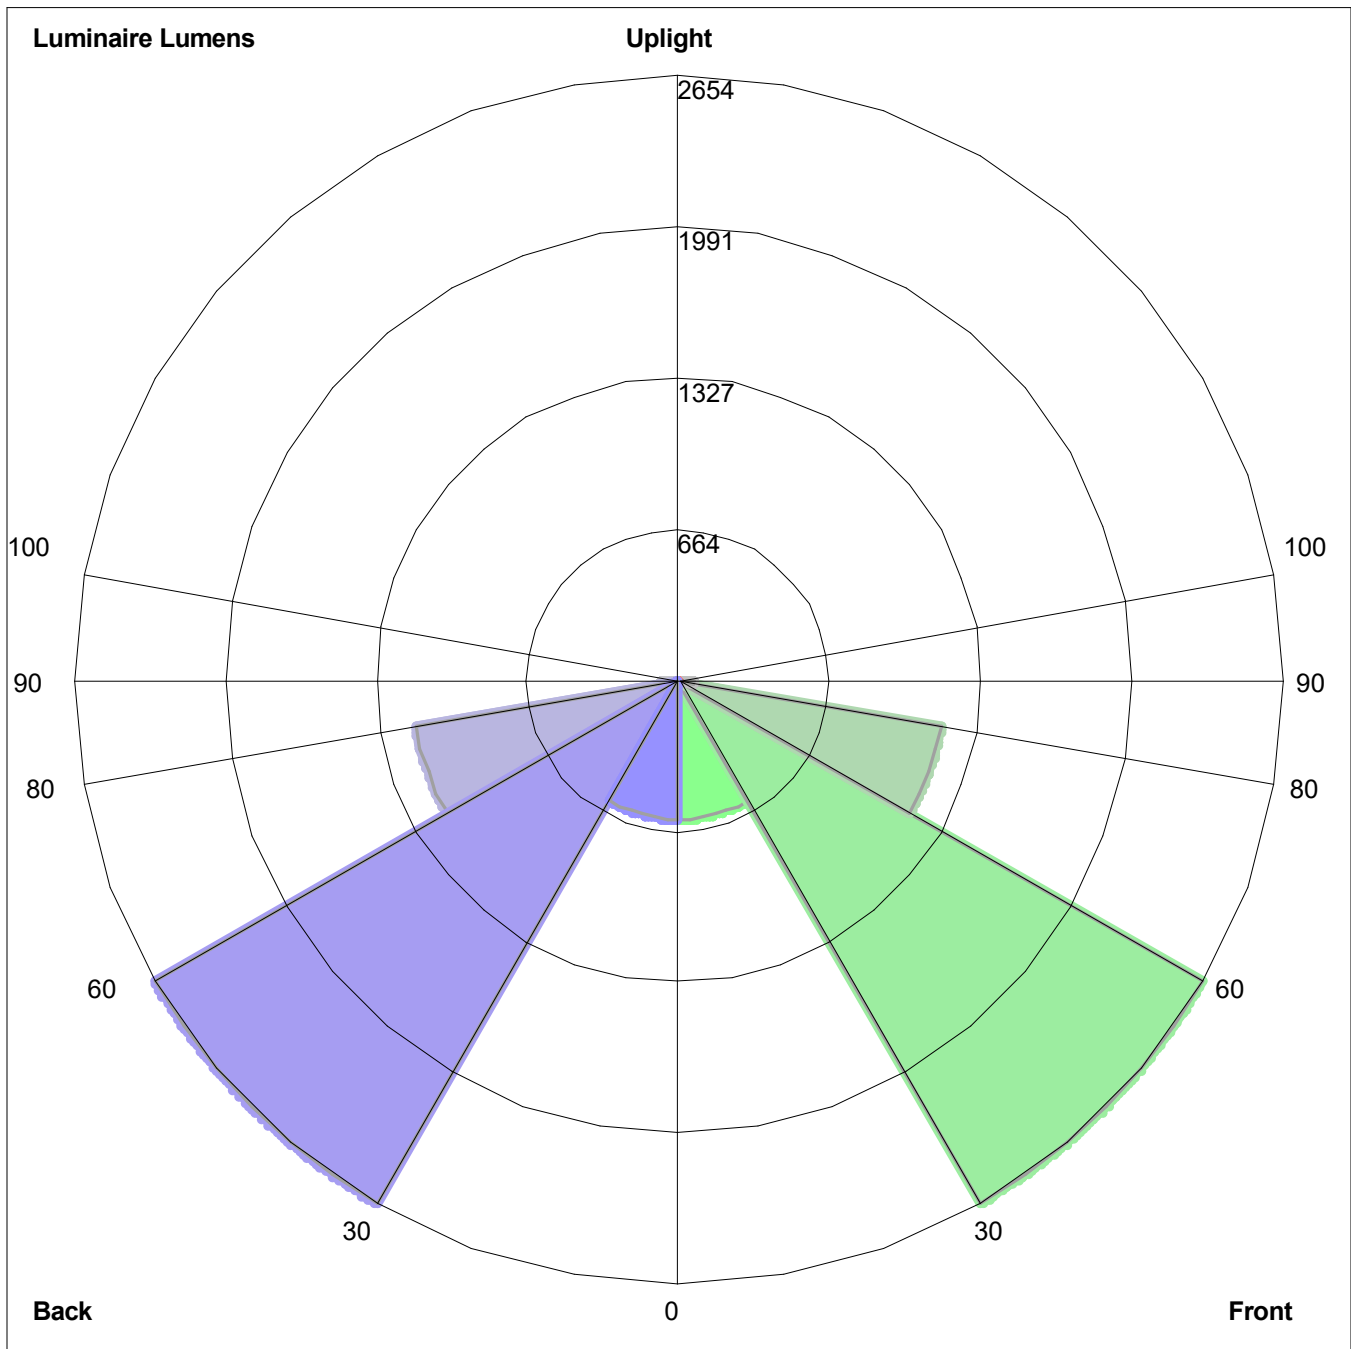

Luminaire Lumens:
Front: Low=611.7, Medium=2654.4, High=1171.5, Very High=70.2
Back: Low=611.7, Medium=2654.4, High=1171.5, Very High=70.2
Uplight: Low=0.0, High=0.0

BUG Rating : B3-U0-G1